

Molok® Deep Collection™ containers with one lifting point

Please read through the instructions before emptying. Always use caution and be careful when lifting. Inspect the condition of the quick equipment and the lifting bag before lifting. Pay attention to occupational safety; do not suspend the load above people or objects and keep a safe distance to the load. Please note that the bags may contain items that do not belong in them. Also note that the containers must not be moved with the help of the closing rope at any point during emptying. If the emptying truck is equipped with a hydraulic rotating hook, the rotation must not be activated before the container has been completely lifted out of the well body.

Instructions apply to the following products:

- MolokDomino
- MolokClassic
- MolokFestival

Always use a lifting strap/chain

Only use lifting straps that are suitable for the load. Each lifting strap section must be at least 1.2 metres long. The lifting point is the quick equipment loop on top of the lid. After attaching the strap to the lifting loop, step away from the container. Do not insert the crane hook into the lifting loop directly. We recommend using a chain strap with one branch. If you are using a two- or four-branch strap, ensure that it is durable enough for lifting with just one branch. If you have a hydraulic rotating hook, do not activate the rotation during emptying.

Lifting the bag

Do not overload the lifting bag. Make sure that the safe working load (=SWL) is not exceeded. SWL is marked on the product certificate on the side of the bag, and it is visible during stage 1 of lifting.

Lift the bag in two stages

1. Lift the bag a little bit to reveal the release rope. Move closer to the container to detach the rope from the loop. You can also check the SWL number at this point. After this, step away from the container. Start lifting slowly and steadily in order to balance out the underpressure in the container. Be particularly careful during emptying if the container is overfull or if you notice that the bag contains items that do not belong in it. Stop lifting if needed.
2. Lift the bag fully from the container and move it above the emptying truck with the crane. Note! Keep the bag straight during lifting. The bag must be completely outside of the body before being moved to the side. Keep a safe distance from the lifting bag. Do not go under the load.

The bottom of the bag is opened as illustrated in the rope lock, by pulling diagonally on the safety lock to remove the rope from the locking device. After this, pull the rope out of the loop to open the bottom. After emptying, close the bag tightly by pulling on the rope.


Place the rope guide in the loop of the rope lock and insert the rope in the locking device, following the instructions on the bag. Next, use the crane to move the bag above the container and lower it towards the container so that you can coil and attach the release rope to the attachment loops. Also note that the bag must not be moved with the help of the locking rope at any point during emptying.

Lower the lifting bag into place and check that the lid is in the right place on top of the container so that the opening is in line with the waste type label. Ensure that the lid or the quick equipment under the lid is not slanted on the container and that the lifting bag is not stuck under the lid. Do not insert your fingers between the container and the quick equipment or the lid.

Inspect the bag visually during emptying. Any broken or damaged parts must be immediately reported to the container owner. Small cuts or holes in the bag are permissible.



Lifting stage 1

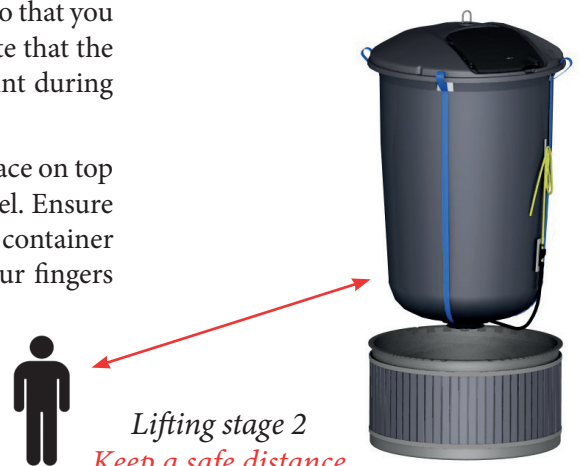

Lifting stage 2
Keep a safe distance